



# Sterilisation Autoclaves "Autester ST DRY PV" 25 Class B

CAPACITY: 25 LITRES.

CONFORMS TO THE REGULATION - 97/23/CEE EQUIPMENT UNDER PRESSURE.



## FEATURES

- Sterilisation chamber and lid made from AISI 316 stainless steel.
- External case epoxy coated.
- Incorporated steam generator separate from the main sterilisation chamber.
- Digital control of all autoclave operations.
- Large back lit LCD 2 x 24 character display.
- Air filter, purifies air before entering the sterilisation chamber.
- Separate clean water reservoir for the steam generator and waste water.
- RS-232 Interface output of parameters to a computer.
- RS-232 Printer interface.

## SAFETY

- Safety valve.
- Prevents the door being opened if under pressure or high temperature.
- Pressure safety Presostat.
- Temperature safety thermostat.
- Door closed correctly detector
- Thermally protected lid.

## ALARMS

- Pressure/Temperature reading out of normal value.
- Door Open.
- Electrical fault.
- Over pressure.
- Over temperature.
- Program error.
- Low water.
- Water reservoir level full.


**Complete selection of programs.**

**Displays in Spanish - English - French.**

**Output RS-232.**



## CONTROL PANEL

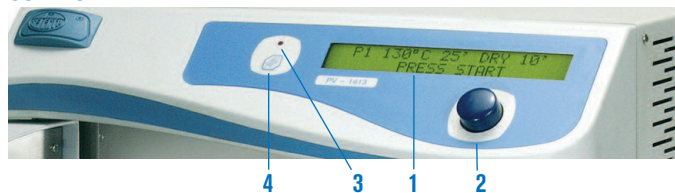


- 1 - LCD parameter display.
- 2 - Mono control button of multi functions that selects:

A - PROGRAMS:	Temperature °C	Sterilisation time (minutes)	Drying Time (minutes)
- (1) Fast No wrapping	134	4	10
- (2) Universal wrapping	134	12	15
- (3) C.J.D.Priones	134	20	15
- (4) Delicate no wrapping	121	15	20
- (5) Delicate wrapped	121	30	20
- (6) Universal	121	20	15
- (7) Disinfection	105	10	-
<b>B - FUNCTION CONFIGURE:</b>			
Language ( Spanish, English and French) – Printer - Timer - Password			
<b>C - TEST:</b> Vacuum test – Bowie Dick test.			
<b>D - CALIBRATION:</b> Temperature – Pressure.			

- 3 - LED in operation.
- 4 - Push button Start - Stop.

MODEL	Part No.	Capacity litres	Ø/Depth (usables) cm	Height/Width/Depth (exterior) cm	Power W	Weight Kg
AUTESTER ST DRY PV 25	4002414	25	30 35	48 46 55	2510	52

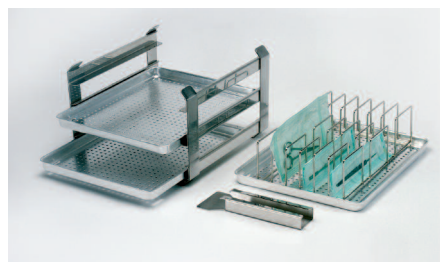

Comes complete with three trays, extractor forceps, and additional support for instruments and sterile wrapping bags.

## ACCESSORIES

**Ink Printer** (no thermal). Paper size 2 1/4" (56 mm) wide. Includes communications and power cable.

Model	Part No.	Height/Width/Depth cm	Power	Weight Kg
	4120113	4 16 10	DC 5V 3A	1



**Water distiller** especially for Autoclaves. (See page 53).